


INTERSTATE 75

TOTAL PROJECT IMPACTS


INTERSTATE 75

NORTHERN STUDY - FROM SOUTH OF US 301 TO NORTH OF FLETCHER AVENUE IN HILLSBOROUGH COUNTY (WPI Segment No. 419235-3)
SOUTHERN STUDY - FROM MOCCASIN WALLOW ROAD IN MANATEE COUNTY TO SOUTH OF US 301 IN HILLSBOROUGH COUNTY (WPI Segment No. 419235-2)

		Mo	ninline Alternative 1	Mainline Alternative 2	
Evaluation Criteria	No-Build Alternative	Minimum Impact	Maximum Impact	Minimum Impact	Maximum Impact
Potential Business Impacts					er er
Number of business relocations	0	12	58	5	29
Potential Residential Impacts					
Number of residential relocations	0	37	95	34	68
Potential Right-of-Way (ROW) Impacts					
Roadway: Area of ROW anticipated to be acquired (Acres)	0.00	102.87	160.54	90.42	135.45
Drainage: Off-site ponds necessary (Yes/No)	NO	NO	YES	NO	YES
Potential Environmental Effects					
Archaeological/historical sites	NONE	51	51	51	51
Section 4(f) sites	NONE	5	5	5	5
Noise-sensitive sites	NONE	640	646	923	929
Wetlands (acres)	0.00	58.46	62.94	58.03	64.79
Floodplains (acres)	0.00	33.2	49.4	20.6	42.6
Surface waters (acres)	0.00	10.61	11.31	8.53	10.94
Threatened and endangered species*	NONE	Min	Min	Min	MIn
Petroleum or hazardous material sites	NONE	18	18	18	18
Estimated Costs** (Present Day Costs in Millions)					
Right-of-way acquisition	\$0.00	\$145.76	\$251.88	\$95.11	\$169.08
Wetlands mitigation	\$0.00	\$5.81	\$6.26	\$5.77	\$6.44
Roadway and Bridge construction	\$0.00	\$1,546.49	\$1,836.38	\$1,381.88	\$1,752.82
Engineering design (15% of construction)	\$0.00	\$231.98	\$275.45	\$207.28	\$262.92
Construction engineering & inspection (15% of construction)	\$0.00	\$231.98	\$275.45	\$207.28	\$262.92
Preliminary Estimate of Total Costs**	\$0.00	\$2,162.02	\$2,645.42	\$1,897.32	\$2,454.18

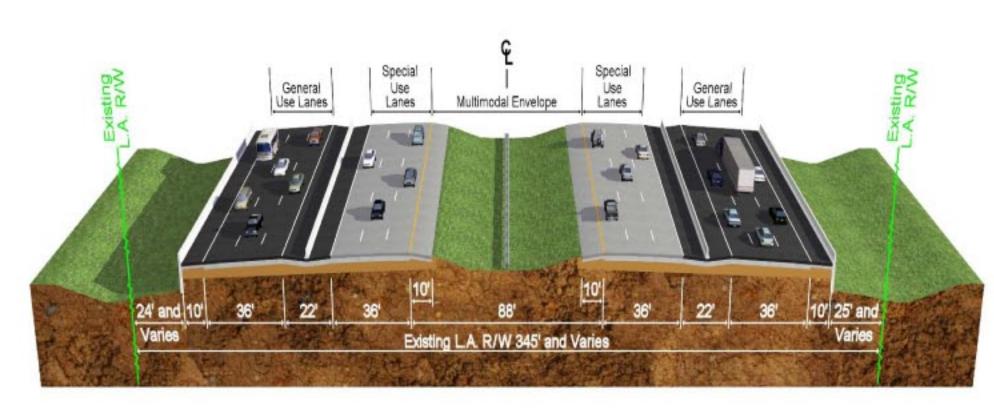

Mainline Alternative 1

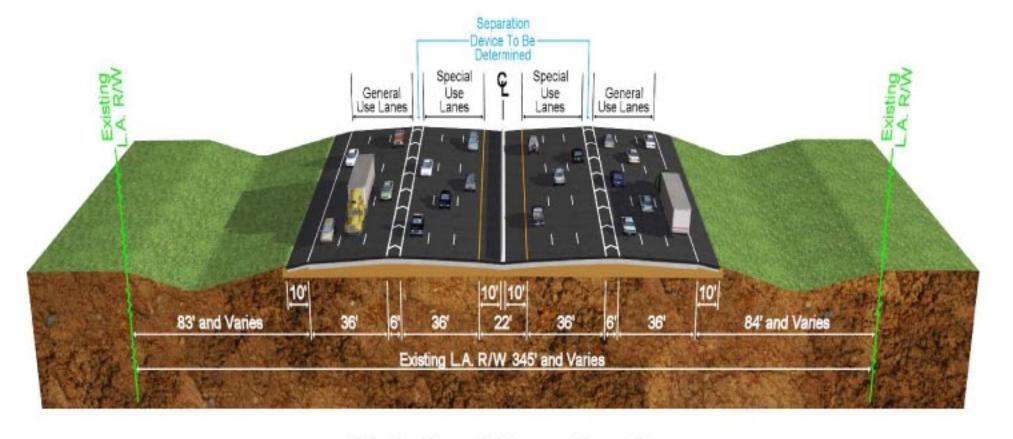

Mainline Alternative 2

^{*} Threatened and Endangered Species
Mod = Moderate Min = Minimal

^{**} Costs do not include stormwater management ponds.